




DECOMPRESSION BALLOON

DECOMPRESSION BALLOON FOR AIR EXHAUST IN CLOSES SYSTEMS

The decompression balloon is connected on some parts of the systems where it is required to exhaust air to avoid any compression : outlets, hoppers....

This accessory can be fixed on a stainless steel plate with metal frame and be installed with a collar and U-shaped seal type collar DN200.

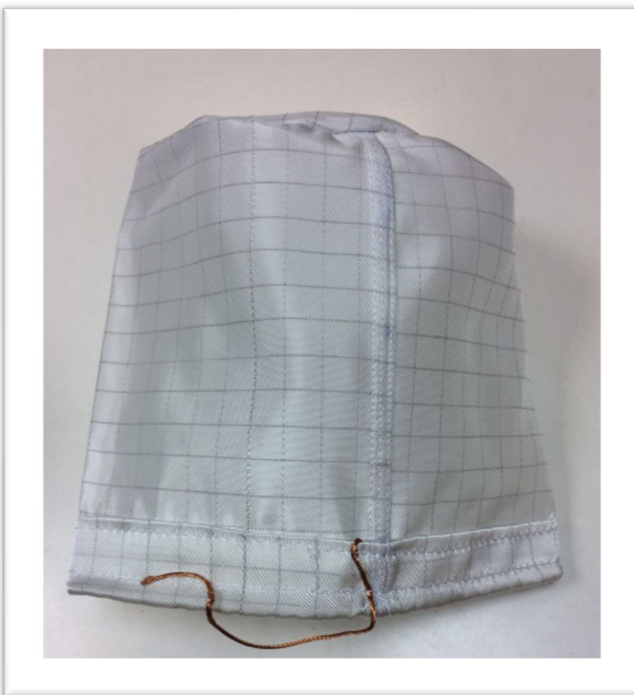

- Material : Polyester Food grade quality
- Max. cleaning temperature: 60°C
- Conductivity cable
- Coupling diameter : 150 mm
- Height : 200 mm

Bgab-01-AC7_uk-01

